



Flow Dressing Table

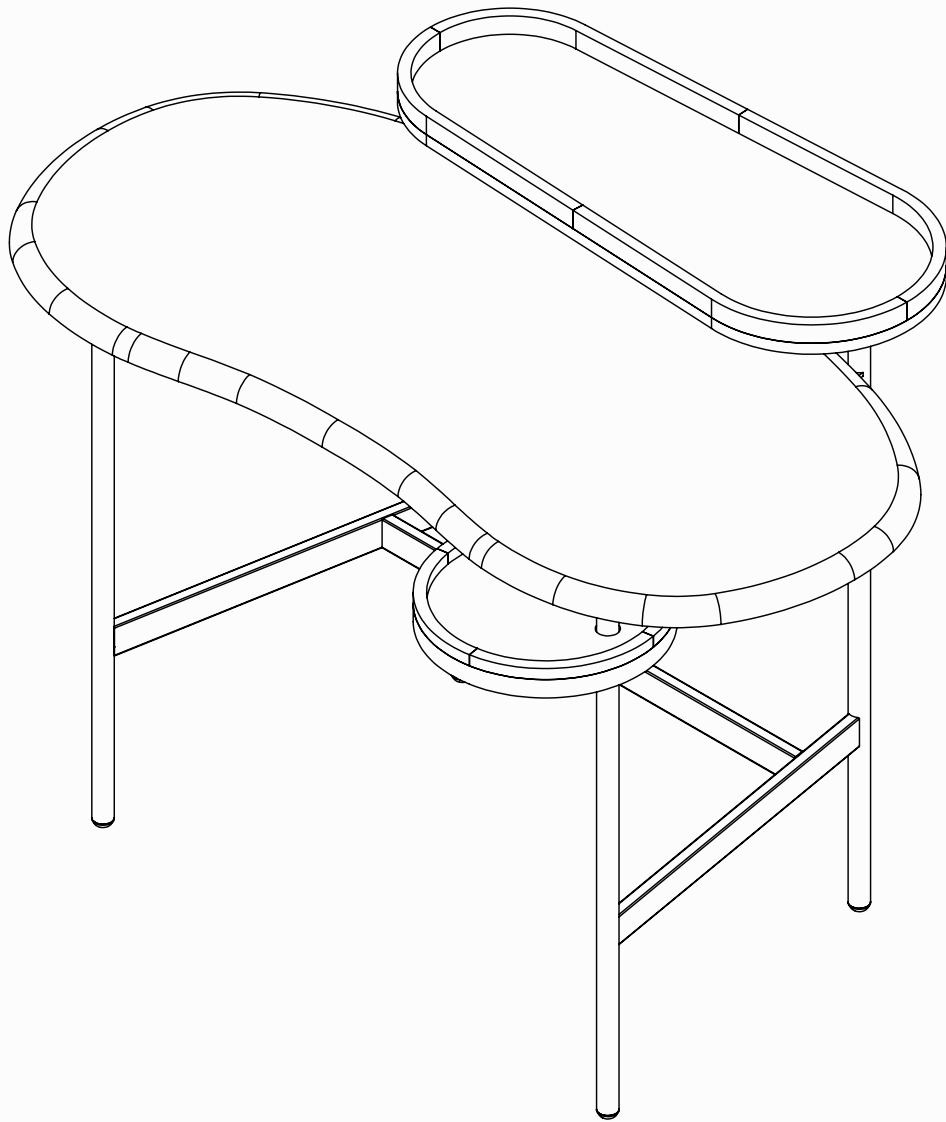




Furnt

www.furnt.co.uk


Product components

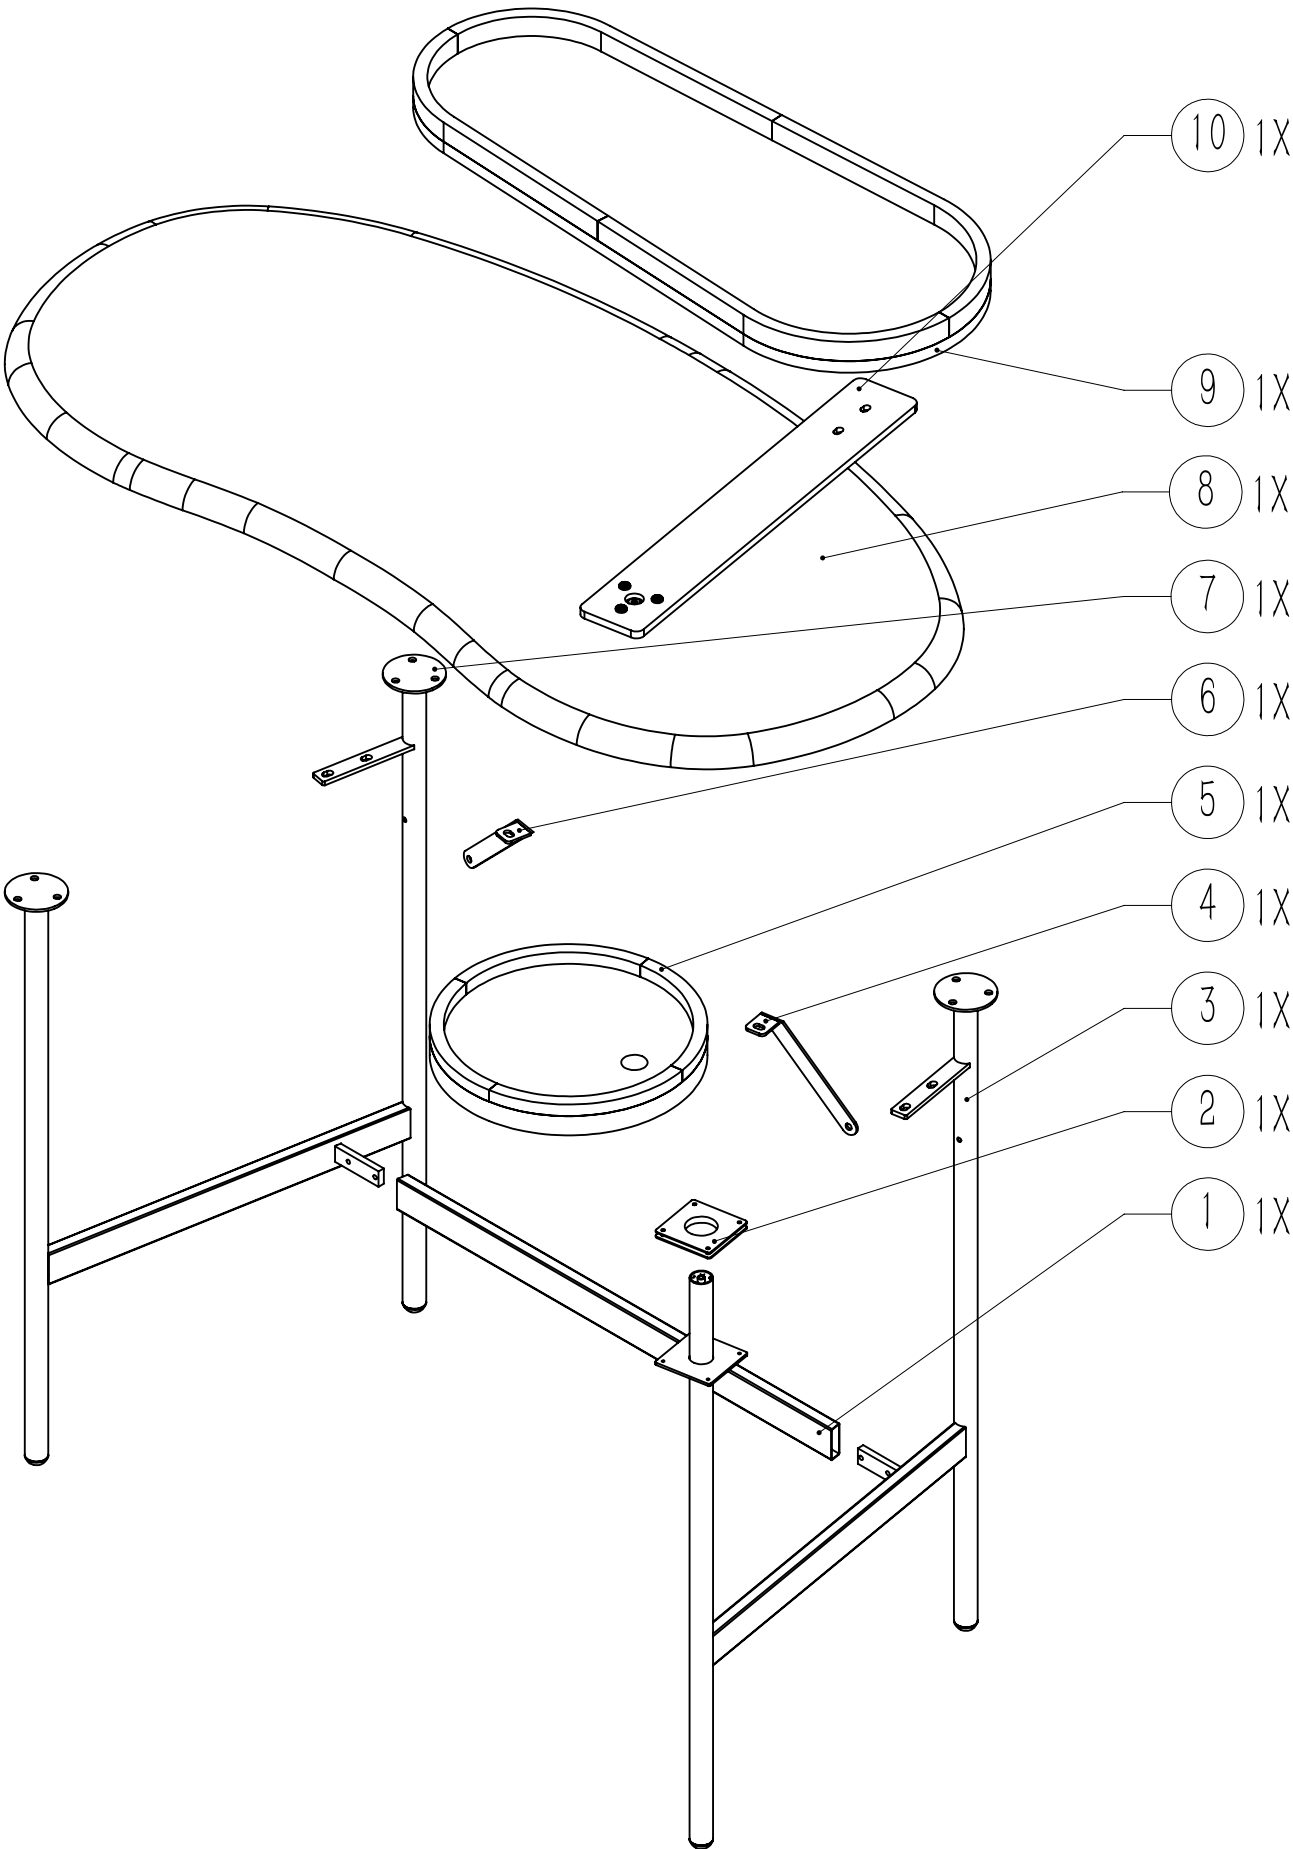


The assembly parts

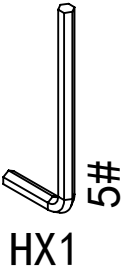

1、


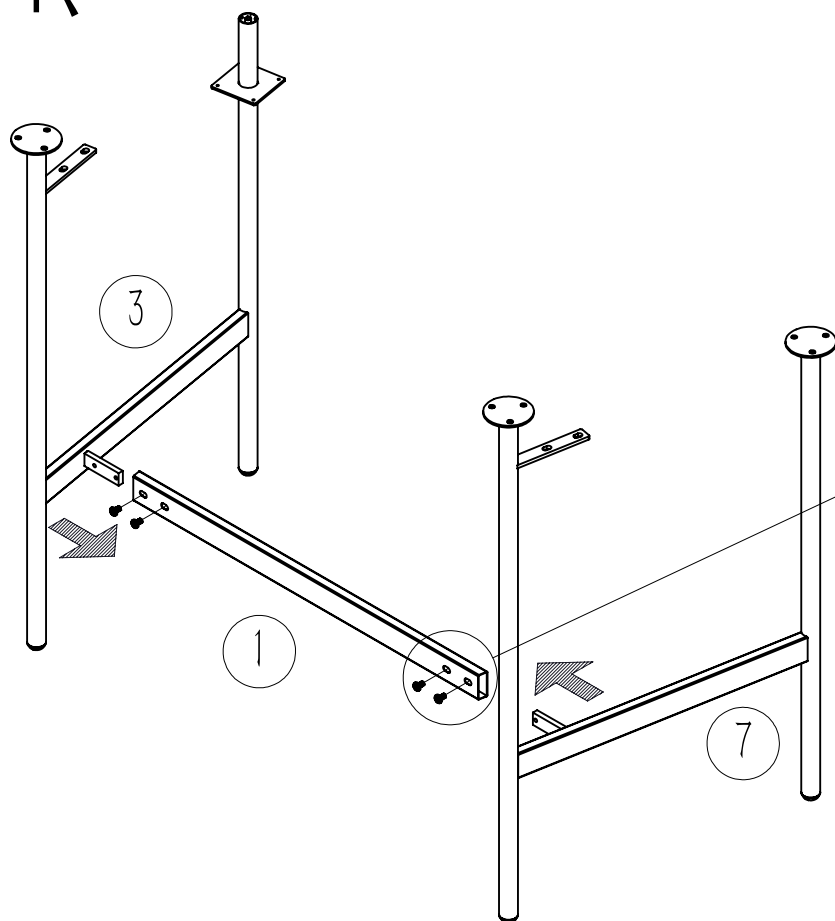


✓		✗	
80 % 		100 % 	

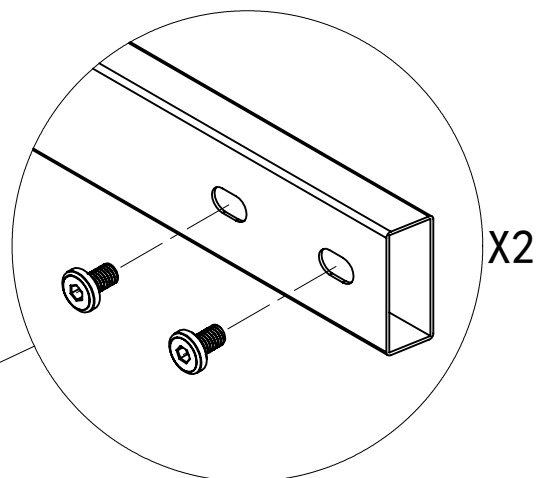


 M6*10
CX4

2、

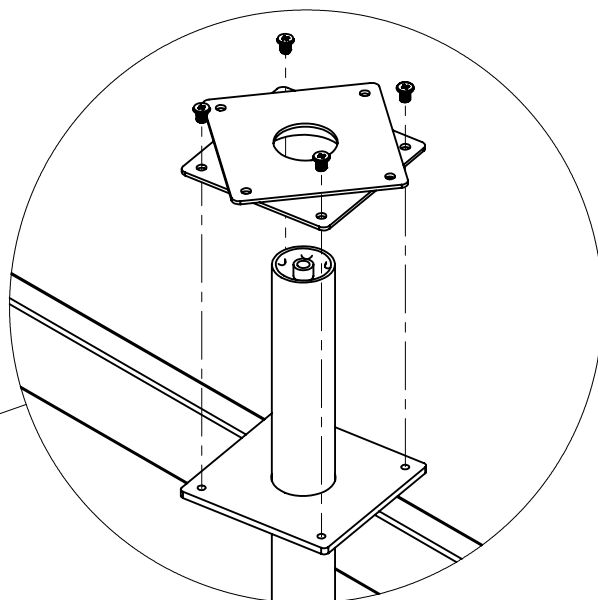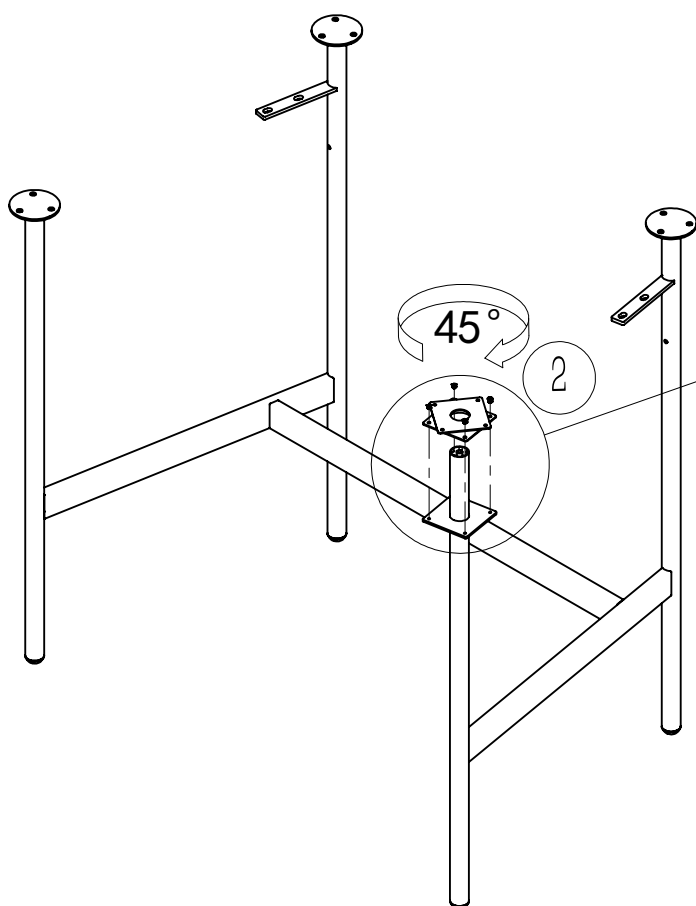


 M4*5
EX4


3、

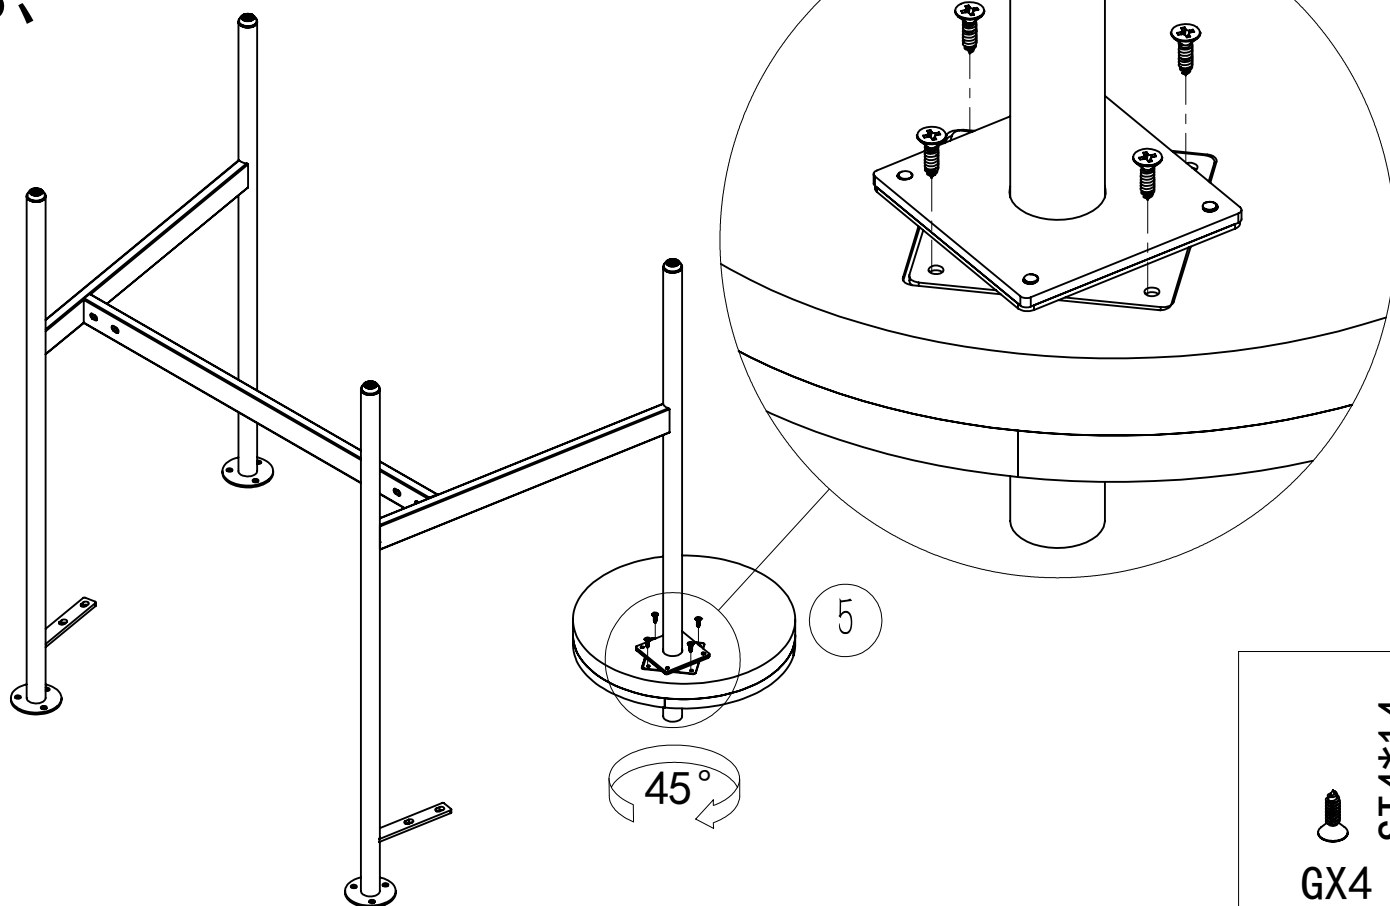

4、

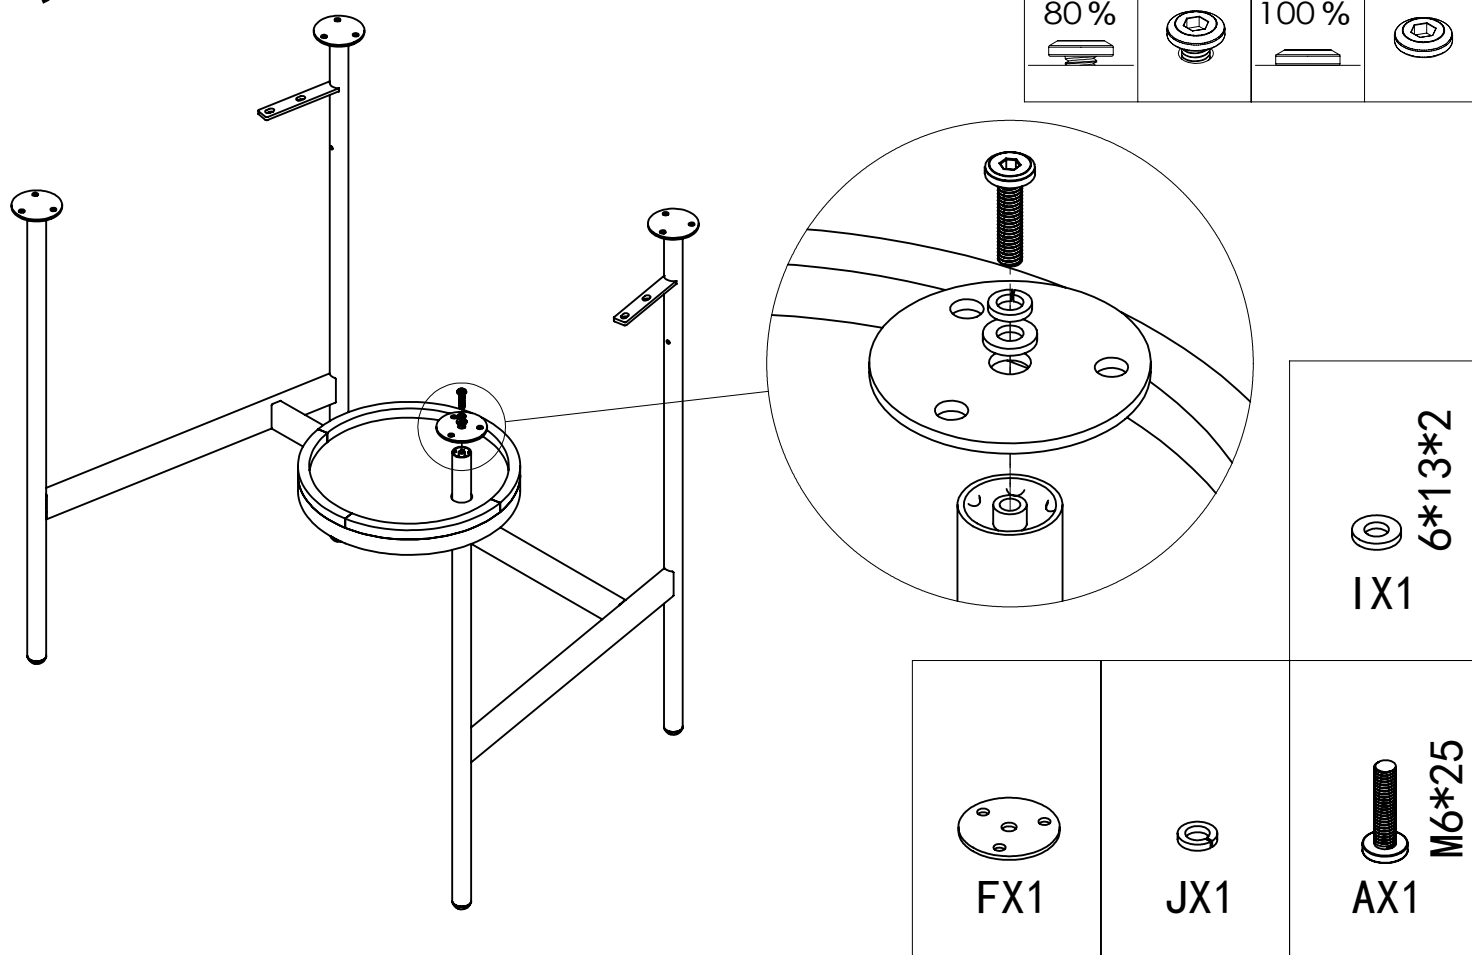

5、

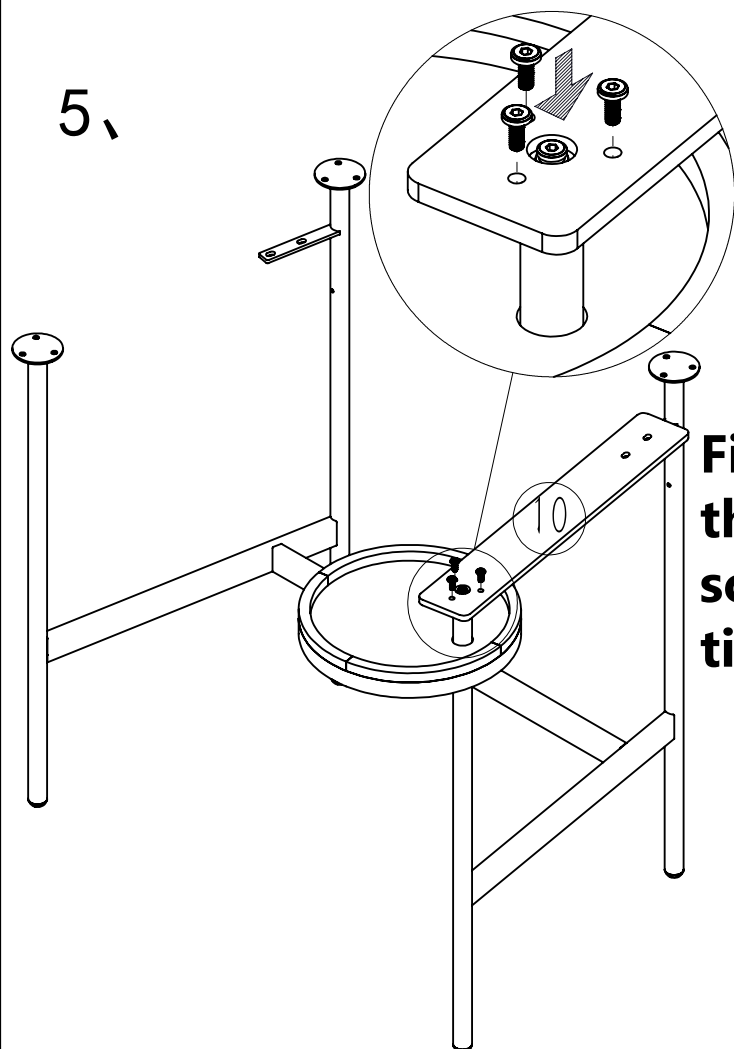

×		✓	
80 % 		100 % 	


Tighten the screws A

First, insert the template into the iron plate, then install three screws B for limiting, and finally tighten screw A

 **M6*14**
BX3


6、

Remove the three screws used for positioning and remove the template

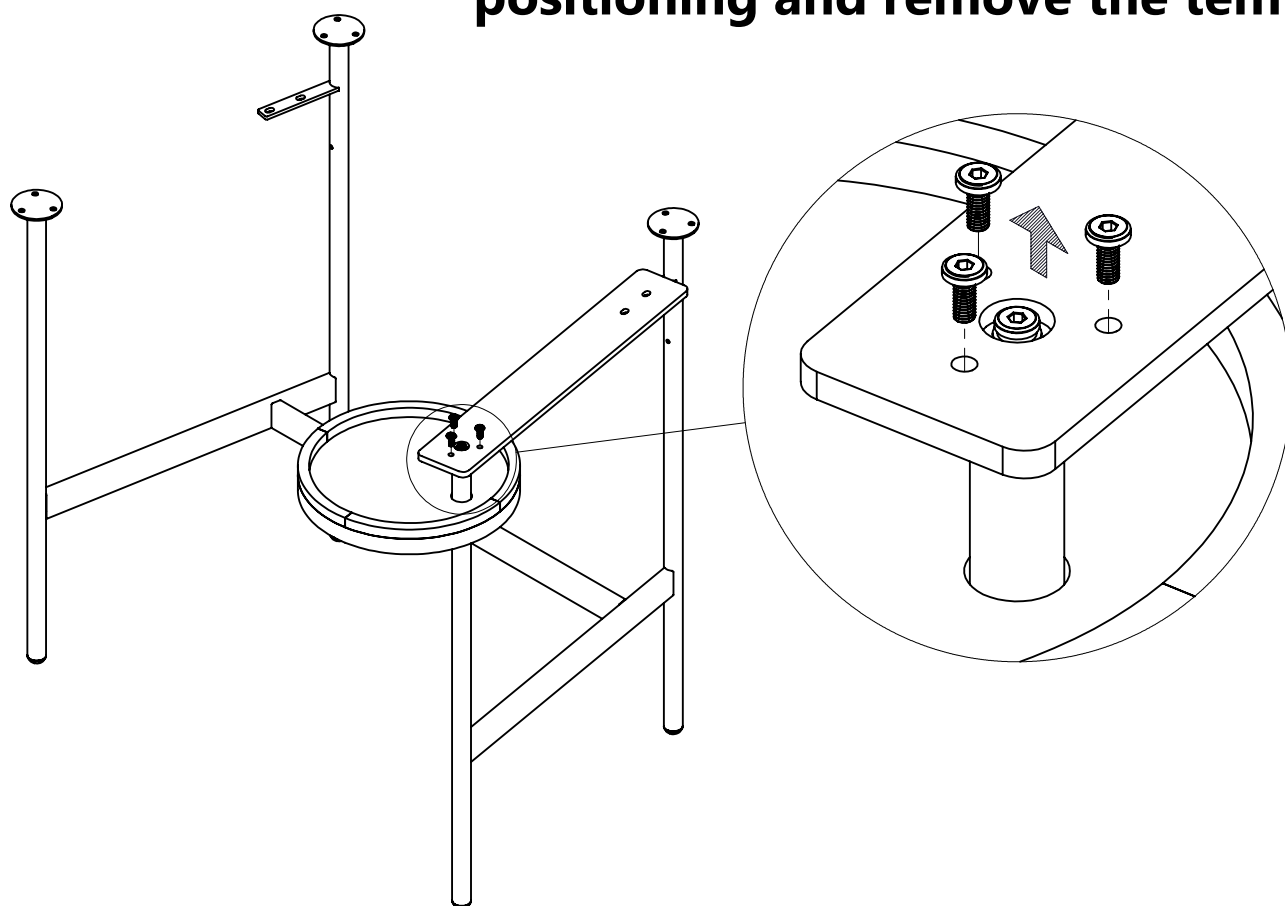

 **M6*14**
BX3


7、

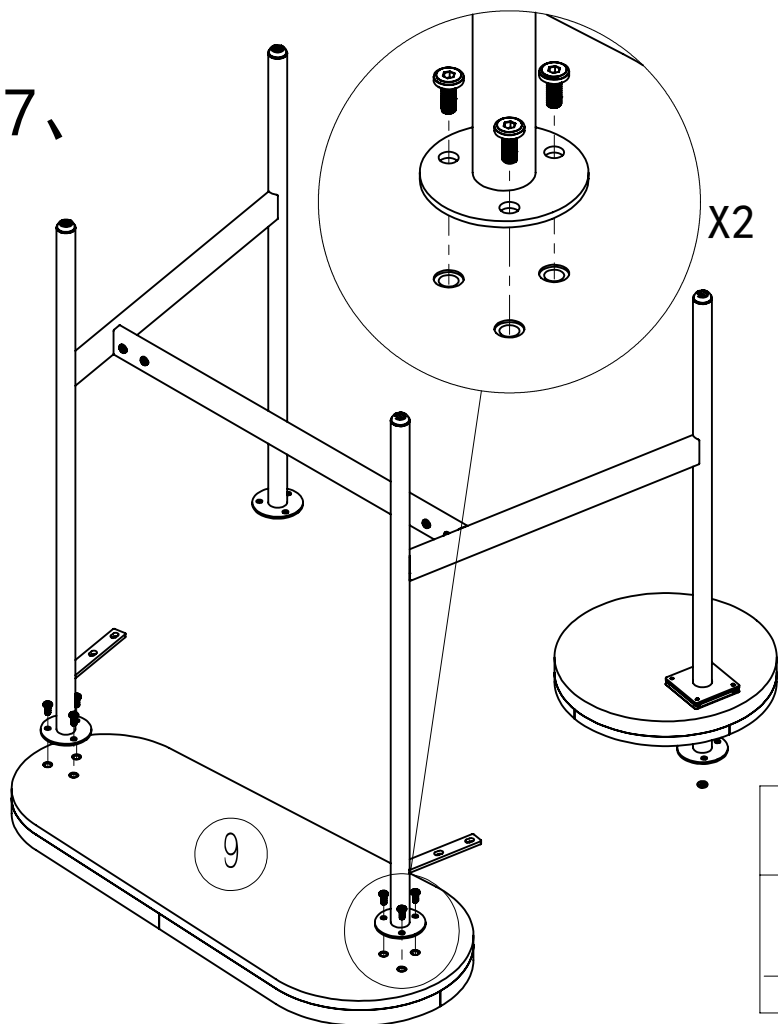

✓		✗	
80 % 		100 % 	

 M6*14
BX6

8、

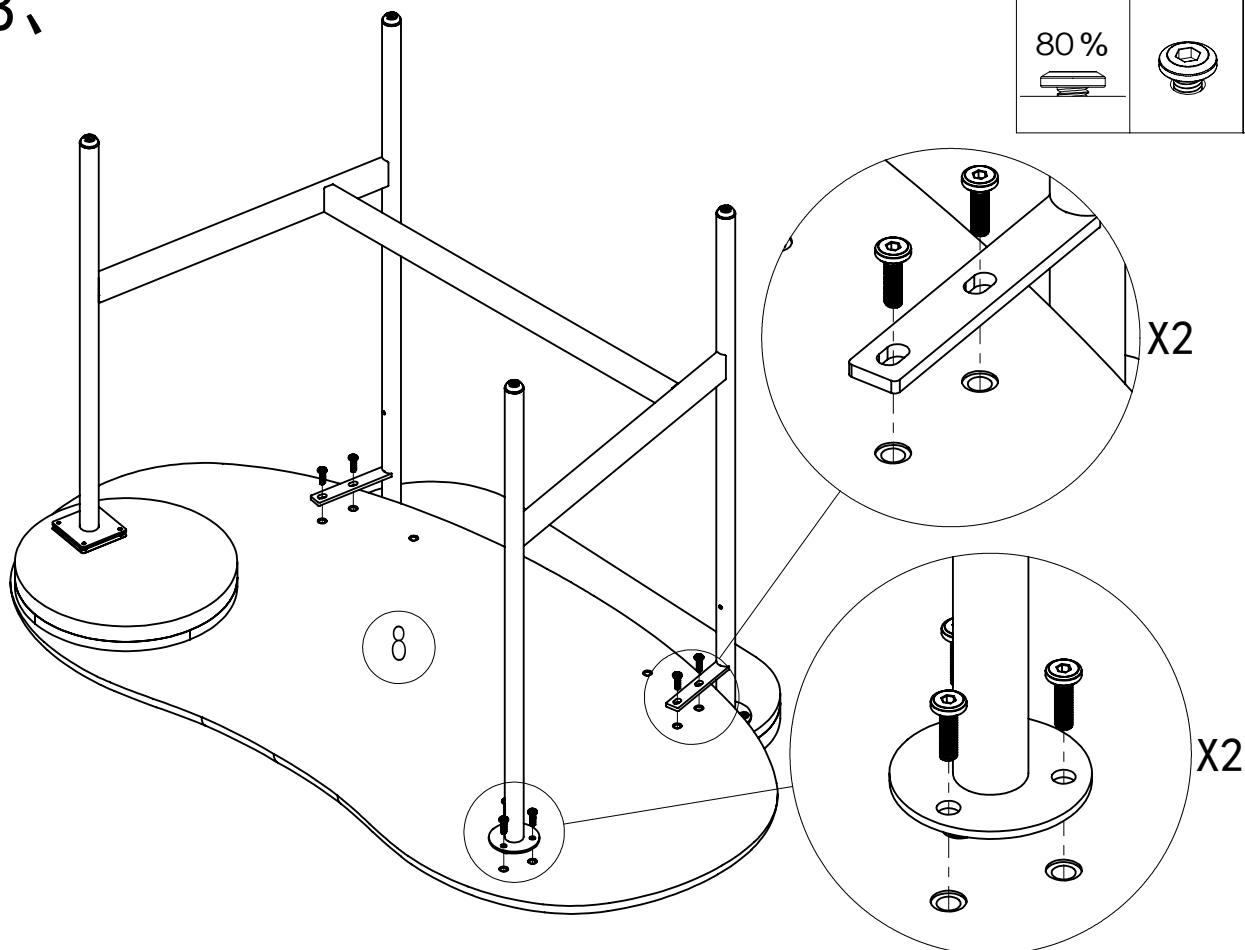



✓		✗	
80 % 		100 % 	

 M6*20
DX10

9、

×		✓	
80 % 		100 % 	

Tighten all the screws

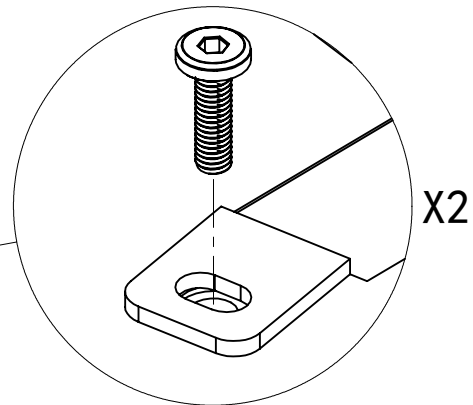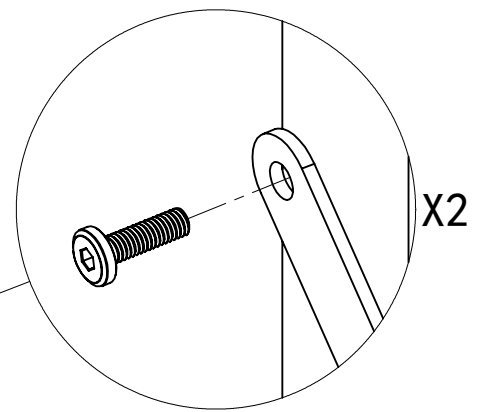

 M6*20
DX4

10、

